

Link do produktu: <https://www.greenbike.pl/rower-szosowy-cannondale-super-six-evo-hi-mod-disc-ultegra-di2-2021-p-6996.html>



Rower szosowy Cannondale Super Six Evo Hi-Mod Disc Ultegra Di2 2021

Cena	40 995,00 zł
Dostępność	Sprawdź dostępność - zadzwoń 616-660-333
Czas wysyłki	5 dni
Kod producenta	00077792
Producent	Cannondale

Opis produktu

Rower szosowy Cannondale Super Six Evo Hi-Mod Disc Ultegra Di2 2021

[ZAPYTAJ o przewidywaną datę dostępności wybranego rozmiaru i koloru - KLIKNIJ TUTAJ](#)

PROMOCJA

DOSTAWA ROWERU W 100% GOTOWEGO DO JAZDY

OSZCZĘDZASZ **299 zł**

Poniżej znajdziesz geometrię oraz tabelę rozmiarów ram.

Specyfikacja techniczna roweru szosowego Super Six Evo Hi-Mod Disc Ultegra Di2 2021


Rama	BallisTec Hi-MOD Carbon, integrated cable routing w/ Switchplate, 12x142 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder
Widelec	BallisTec Hi-MOD Carbon, SAVE, integrated crown race, 12x100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/4" steerer and 55mm offset (44-54cm), 1-1/8" to 1-3/8" steerer and 45mm offset (56-62cm)
Korba	HollowGram, BB30a, OPI SpideRing, 52/36
Przerzutka przednia	Shimano Ultegra Di2, braze-on
Przerzutka tylna	Shimano Ultegra Di2
Manetki	Shimano Ultegra Di2, 11-speed
Kaseta	Shimano Ultegra, 11-30, 11-speed
Łańcuch	Shimano HG701, 11-speed
Obręcze	HollowGram 45 SL KNOT, Carbon, 20h front, 24h rear, 45mm deep, 21mm IW, tubeless ready
Piasty	(F) HollowGram KNOT, sealed bearing 12x100mm centerlock / (R) HollowGram KNOT, 12x142mm centerlock w/ DT Swiss 240 internals
Szprychy	DT Swiss Aerolite, straight-pull
Hamulce	Shimano Ultegra Di2 hydraulic disc, 160/140mm RT800 rotors
Dźwignie hamulcowe	Shimano Ultegra Di2
Kierownica	HollowGram SAVE SystemBar, Carbon, 8 deg. pitch adjust
Mostek	HollowGram KNOT, Alloy w/ cable cover, -6°
Gripy	Cannondale Bar Tape, 3.5mm
Łożyska kierownicy	Integrated, 1-1/8" - 1-1/4" (44-54 cm), 1-1/8" - 1-3/8" (56-62

Siodło
Szttyca

Rok
Platform
Rodzaj miernika mocy

cm)
Prologo Dimension NDR, Tirox rails
HollowGram 27 SL KNOT, Carbon, 2 bolt clamp, 330mm, 0mm
offset (44-48cm), 15mm offset (51-62cm)
2021
SUPER SIX
Cannondale Wheel Sensor

Geometria

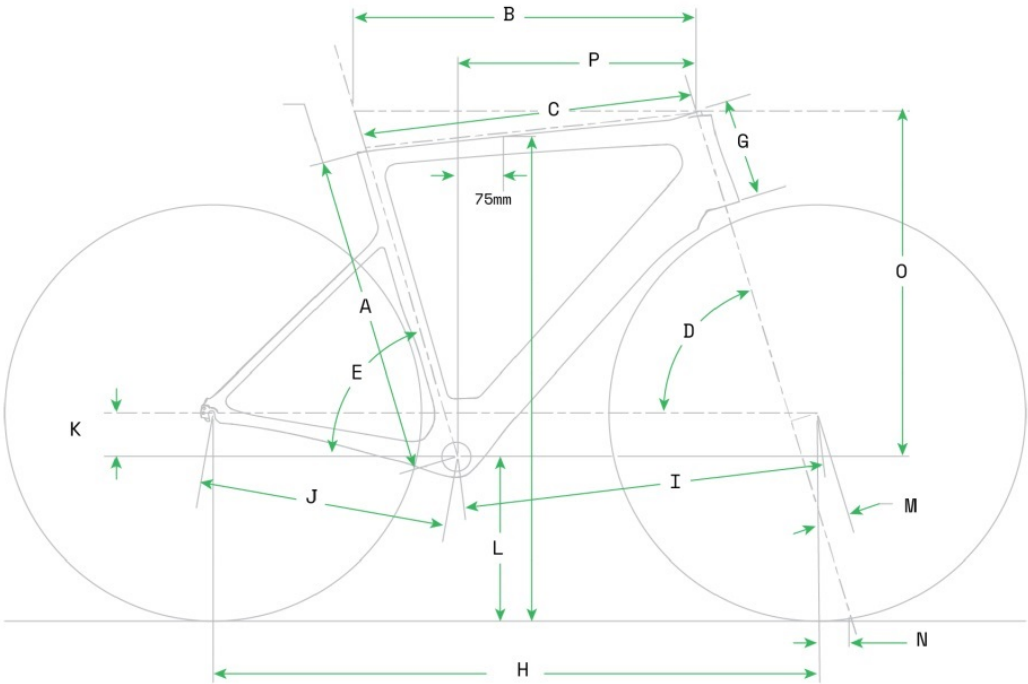

SuperSix EVO

	44	48	51	54	56	58	60	62
A Seat Tube Length (cm)	40	43.8	47.7	51.5	53.6	55.8	57.9	60
B Top Tube Horizontal (cm)	51.2	52	52.8	54.6	56.2	57.8	59.4	61.1
C Top Tube Actual (cm)	NA							
D Head Tube Angle	70.9°	71.2°	71.2°	71.2°	73.0°	73.0°	73.0°	73.0°
E Seat Tube Angle Effective	74.3°	74.3°	74.3°	73.7°	73.3°	72.9°	72.5°	72.1°
F Standover (cm)	69.8	72.6	75.6	78.8	80.8	83.1	85.0	87.0
G Head Tube Length (cm)	9.9	11.4	13	15.3	16.4	18.8	20.9	23
H Wheelbase (cm)	97.9	98.5	99.4	100.8	99.2	100.5	101.6	102.8
I Front Center (cm)	58.2	58.8	59.7	61.1	59.5	60.7	61.8	63
J Chain Stay Length (cm)	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8
K Bottom Bracket Drop (cm)	7.4	7.4	7.4	7.2	7.2	6.9	6.9	6.9
L Bottom Bracket Height (cm)	26.8	26.8	26.8	27.1	27.1	27.3	27.3	27.3
M Fork Rake (cm)	5.5	5.5	5.5	5.5	4.5	4.5	4.5	4.5
N Trail (cm)	6	5.8	5.8	5.8	5.8	5.8	5.8	5.8
O Stack (cm)	50.4	51.9	53.4	55.4	57.4	59.4	61.4	63.4
P Reach (cm)	37	37.4	37.8	38.4	39	39.5	40	40.6



Produkt posiada dodatkowe opcje:

Wybierz rozmiar:: 44 , 48 , 51 , 54 , 56 , 58 , 60 , 62